



**MONO  
Half  
Cut**

**25  
Years**

**GUARANTEED**

**Black**

**White**

1755

1038

Weight 19.5 kg

**Loading Capacity**

	40'HQ Container	Pallet
Container	40'HQ Container	Pallet
PCS	988 PCS	36 PCS

**High Efficiency Perc Half Cut Mono Cells**


**Electrical Characteristics**

Item no.	Pmax	Vmp	Imp	Voc	Isc	Mod. Efficiency
HS360M-60-166	360W	33.70	10.69A	41.1V	11.53A	19.8%
HS365M-60-166	365W	33.90	10.77A	41.3V	11.63A	20.0%
HS370M-60-166	370W	34.10	10.86A	41.5V	11.72A	20.3%
HS375M-60-166	375W	34.20	10.98A	41.6V	11.85A	20.6%
HS380M-60-166	380W	34.30	11.09A	41.7V	11.98A	20.9%

**Technical Characteristics**

Cells	Mono (166 x 83 mm)
Quantity	120 (6 x 20)
Size	1755 x 1038 x 30 mm
Glass	Tempered High Transmission Glass
Frame	Silver/Black
Backsheet	White/Black
Junction Box	TÜV certified IP68
Series Fuse Rating	20A x 3 dioden
Maximum System Voltage	1500V DC TÜV
Cables	300mm + 300mm - / 4.0 mm <sup>2</sup>
Test Standard Condition	AM=1.5 E=1000/ m <sup>2</sup> TC=20°C
NOCT	45°C +/- 2°C
Temperature Coefficients:	Pmax -0.39%/K Voc -0.29%/K; Isc 0.049%/K

**I-V Curve**

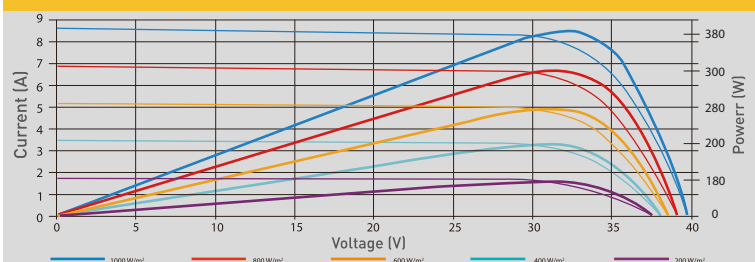

Waarschuwing: lees eerst de installatie handleiding voordat je het product verwerkt.

**HANOVER NEW ENERGY PTY LTD**  
7 Koorabel Place  
Baulkham Hills NSW 2153



**HANOVER SOLAR GmbH**  
Herrenstrasse 13  
D30159 Hannover

**HANOVER SOLAR BV**  
Vierlingweg 39A  
Bergen op Zoom 4612PN